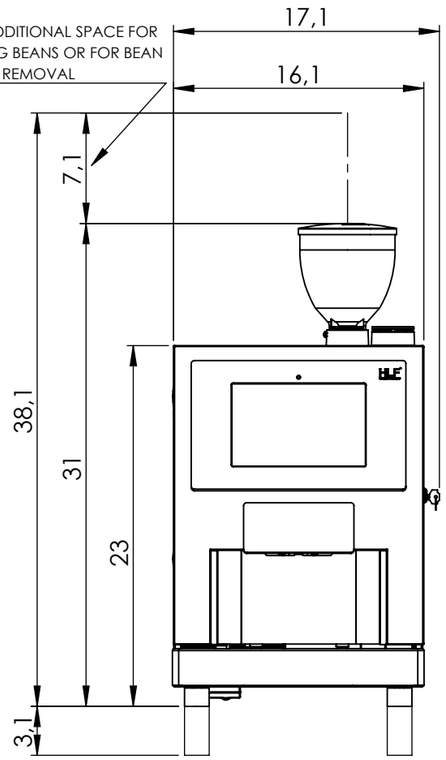

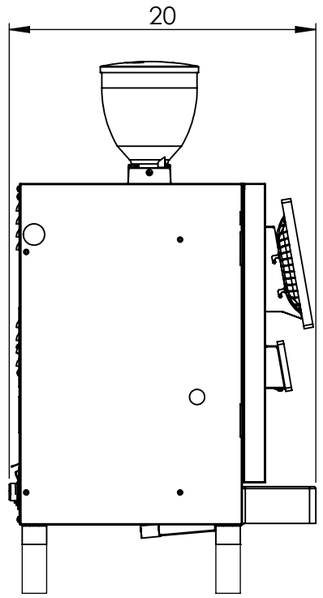

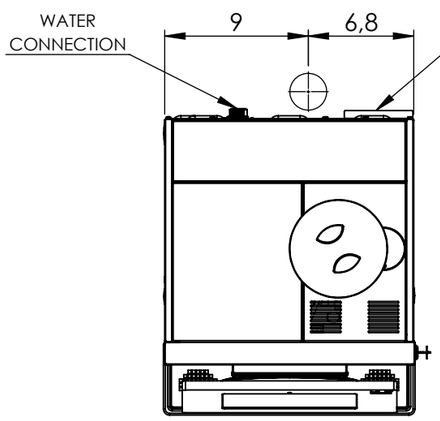

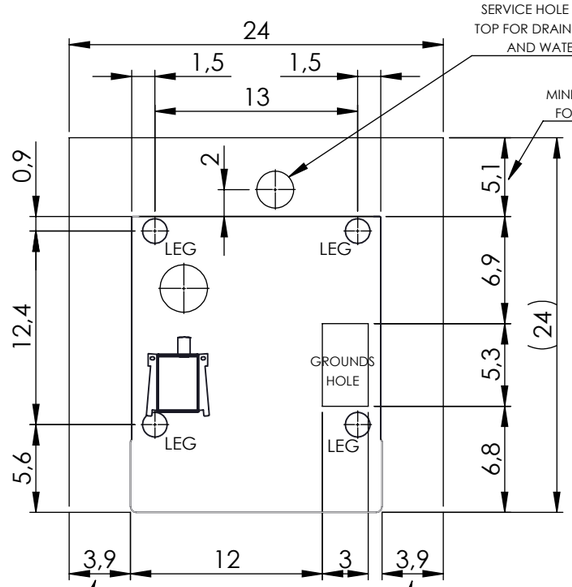

Physical site requirements : model HLF 2700

HEIGTH 41,2 inches INCLUDES 4,4 inches LEGS: IT'S POSSIBILE TO HAVE DIFFERENT LEGS HEIGHT.

Countertop space : 24 inches (Width), 24 inches (Depth), 41,2 inches (Heigth)
(Machine Only);

additional 10,3 inches (Width) with Milk fridge on the left / rigth side;
additional 10,3 inches (Width) with Cup warmer on the left / right side;
additional 18,1 inches (Width) with Cash box on the left side;

A DRAIN HOSE ACCESS HOLE IN THE COUNTER TOP MAY BE REQUIRED;

Countertop must be able to support : 110 lb (Machine Only);
additional 60 lb with Milk fridge on the rigth side;
additional 44 lb with Cup warmer on the left side;
additional 33lb with Cash box on the left side;

Power requirements : (FOR EU)
250 V AC, 10 AMP dedicated circuit using a SHUKO receptacle.

(FOR AU)
230 V AC, 10 AMP dedicated circuit using an AS 3112 receptacle.

(FOR US)
125 V AC, 15 AMP dedicated circuit using a NEMA 5-15 receptacle;

(FOR UK)
250 V AC, 13 AMP dedicated circuit using a BS 1363 receptacle.

ELECTRICAL RECEPTACLE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE.

Plumbing requirements : Cold water source with a dedicated female 3/4" fitting and an in-line shut-off valve.

Water supply pressure must be MIN 1 bar (14,5 PSI) and MAX 6 bar (87 PSI).

WATER LINE MUST BE LOCATED WITHIN 1,5 m OF THE MACHINE.
If your location has a reverse osmosis system, a fresh water bypass is required.

Room temperature : cannot exceed 32 °C (90 °F).

Piegatura	———
Piegatura contraria	- - - - - - - - -
Senso di Satinatura	⟷
Satinatura opposta	⟵ - - - - - ⟶
Punto attaco laser	*
Superficie in vista	—— - - ——
Quota sotto controllo	XX

LEGENDA

Drain system requirements:
-It's important that the drain hose has a continuos rate of fall.
-Minimum rate of fall required is one inch for foot(85mm per meter)
-Internal diameter of the tube junction on the machine 0,78 inch.
-Internal diameter of the tube junction on the drain 0,82 inch.



N°	Pos.	Descrizione Modifica	Disegnato	Approvato	Data
02	- -	--	-	-	-
01	- -	--	-	-	-

IL PARTICOLARE DEVE ESSERE CONFORME ALLA DIRETTIVA 2002/95/CE (RoHS) E ALLE DIRETTIVE EN 60335-1 E 60335-2-75, AD ECCEZZIONE DEI COMPONENTI 120 VAC (UL)

Specifiche di Fornitura HLF : - -

Tolleranze generali per grandezze lineari ed angolari prive di indicazioni di tolleranze specifiche : UNI EN 22768/1 - m
Tolleranze geometriche per elementi privi di indicazione di indicazione di tolleranze specifiche : UNI EN22768/2 - k

Stato : **DEFINITIVO** VALIDO PER PRODUZIONE E/O ACQUISTO

Mod. Rif :	Note	Peso (Kg) :	Disegnato :	Controllato :	Approvato :	Viste :
2700	- -	50		- -	- -	
Finitura :			Data :	Data :	Data :	Foglio : A3
- -			04/04/2022	- -	- -	Scala : 1:10

HLF ITALIAN DESIGN

Materiale :	Ricavato da :	Sostituisce il :
- -	- -	- -

Denominazione :	COD. Articolo :	Rev.
PLANNING DIAGRAM 2700(INCH)	- -	00

HLF S.r.l. si riserva a termini di Legge la proprietà del presente documento, con divieto di divulgazione e/o riproduzione, anche parziale, salvo sua autorizzazione scritta